


GVT WOODEN PLANK

THE FINEST WOODWORK FOR THE FINEST LIVING.

Experience the calmness and elegance of nature from the comfort of your own home. Discover the strength, textures, and tones that wood has to oer. The collection of 200x1200mm tiles is everything dierent you were looking for.



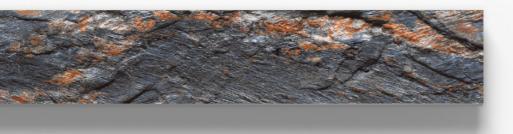






GLITTER WITH NATURE FOR YOUR INTERIOR






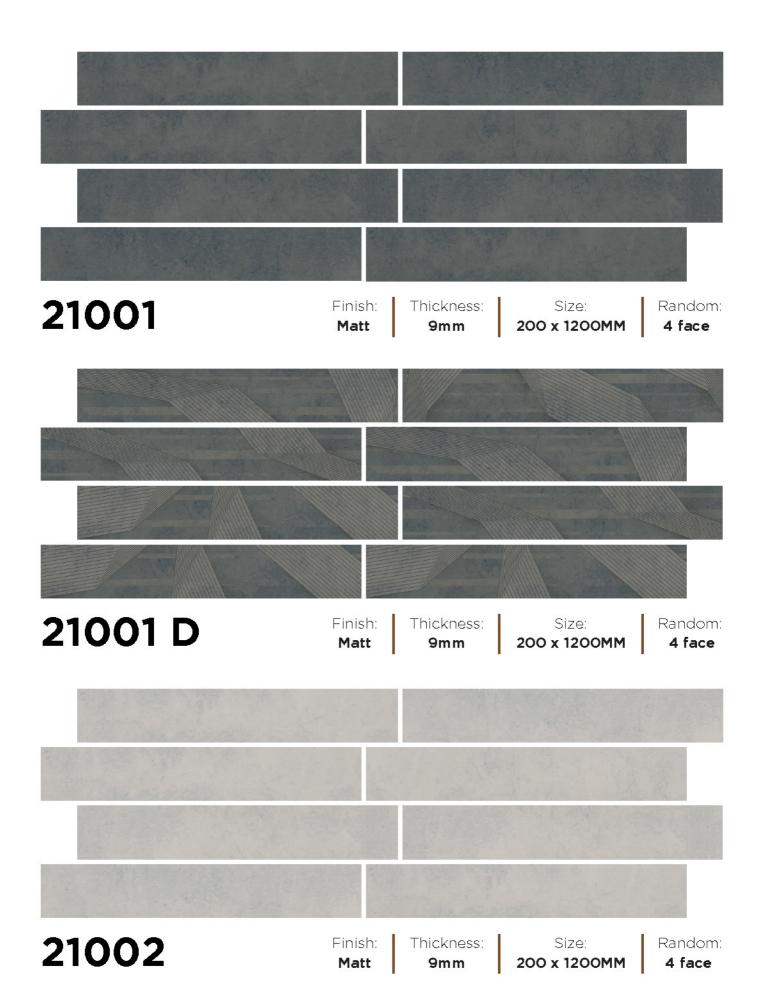

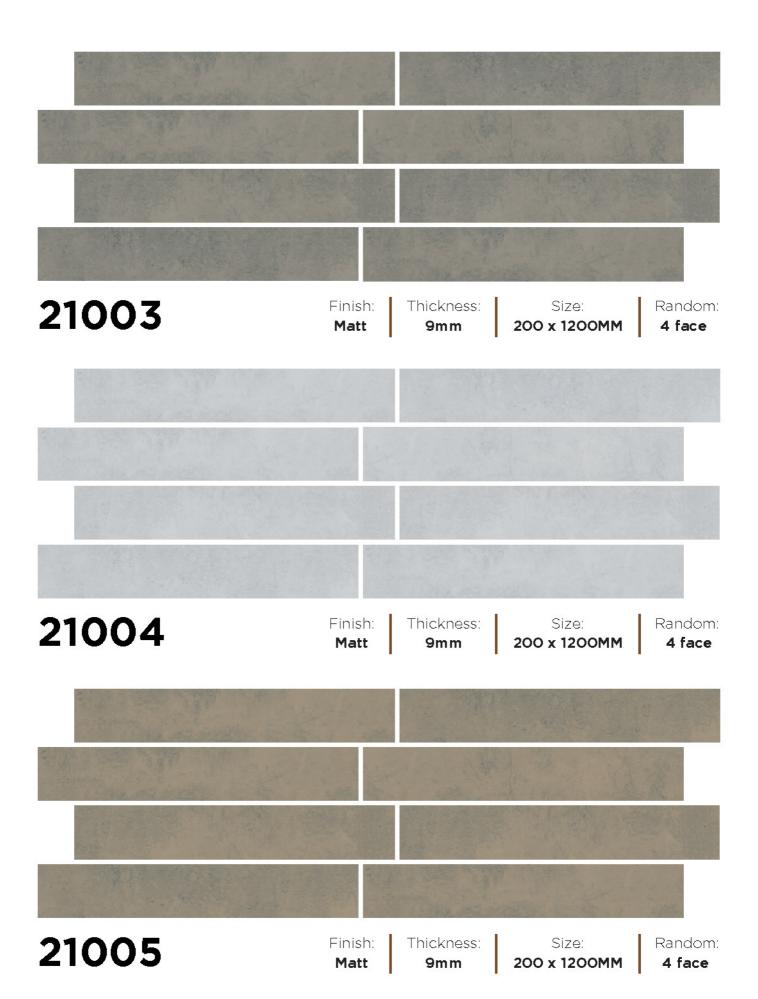

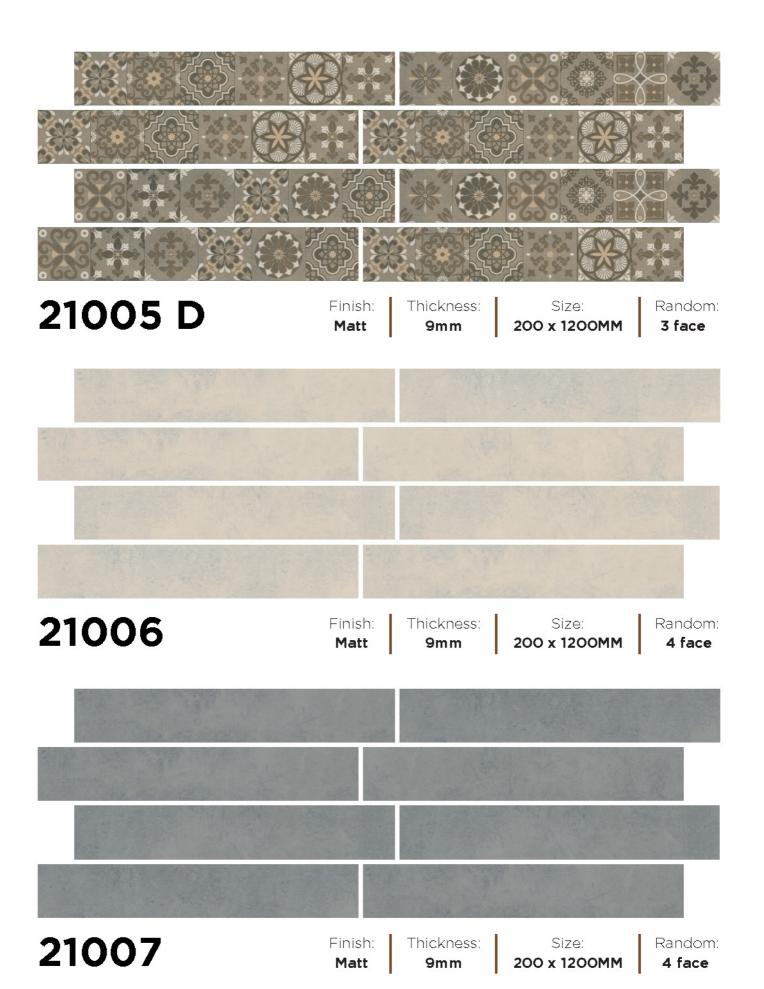

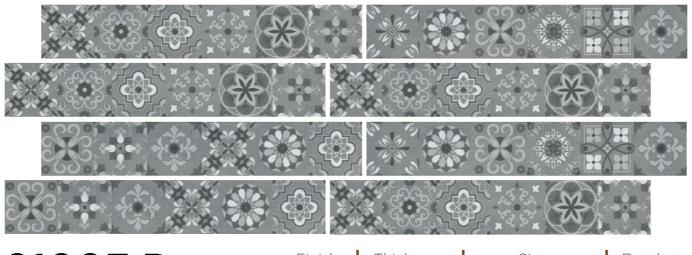


21007 D

Finish: **Matt** Thickness:


Size: **200 x 1200MM**

Random: **3 face**

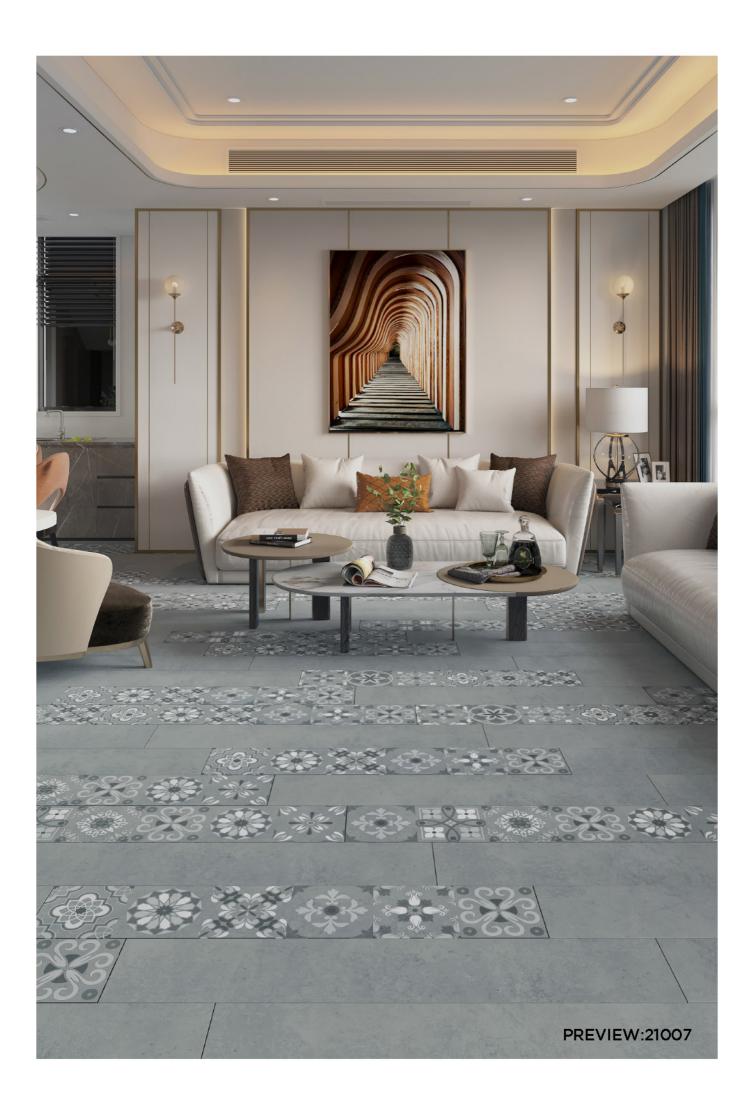





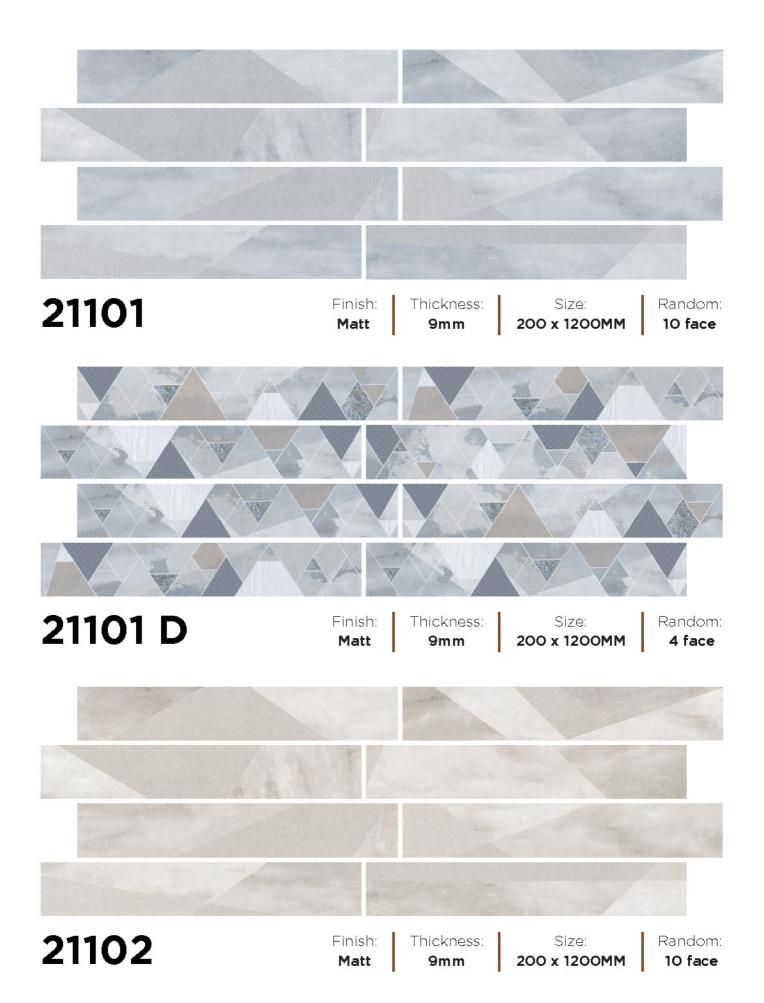




Finish: Matt

Thickness: Size: 9mm 200 x 1200MM

Random: 10 face



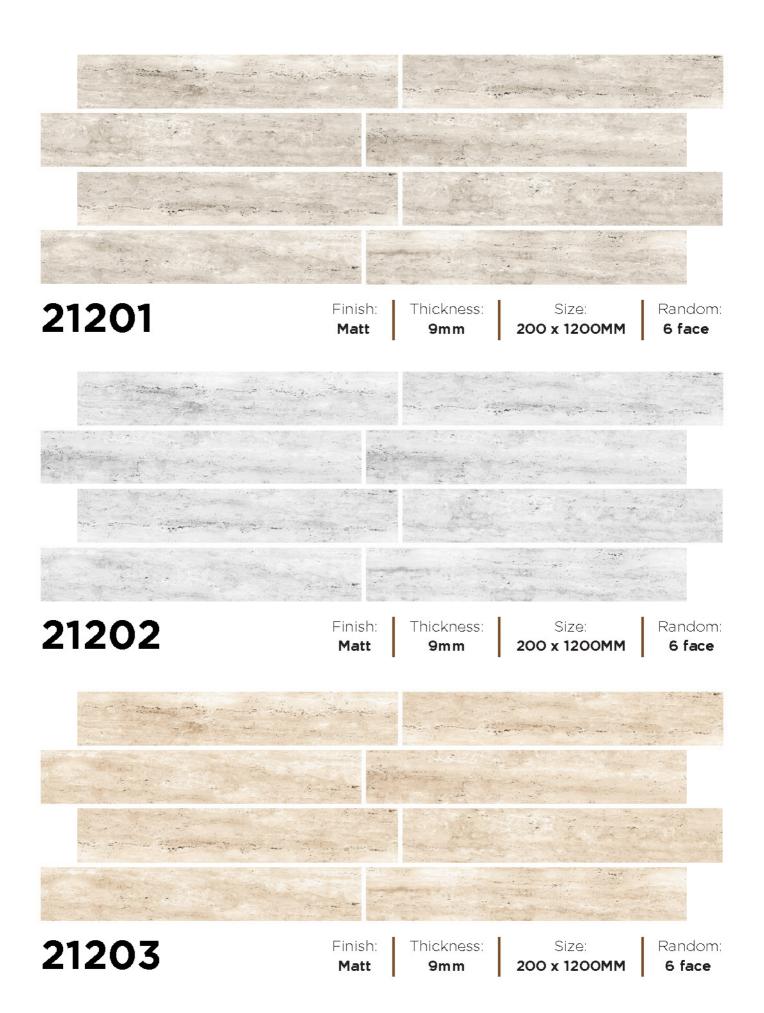
















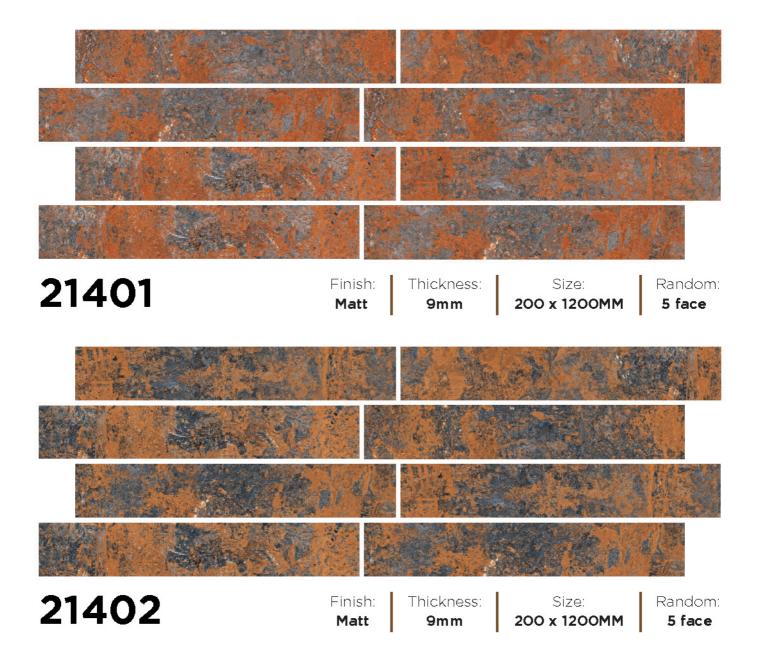

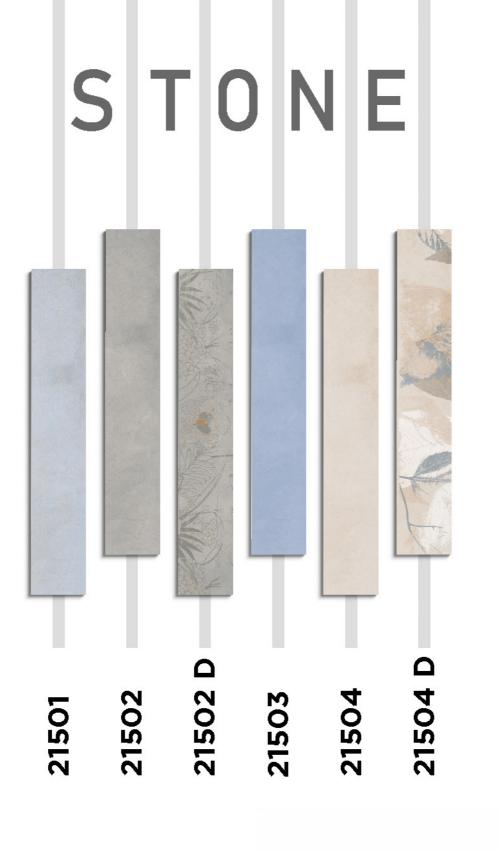






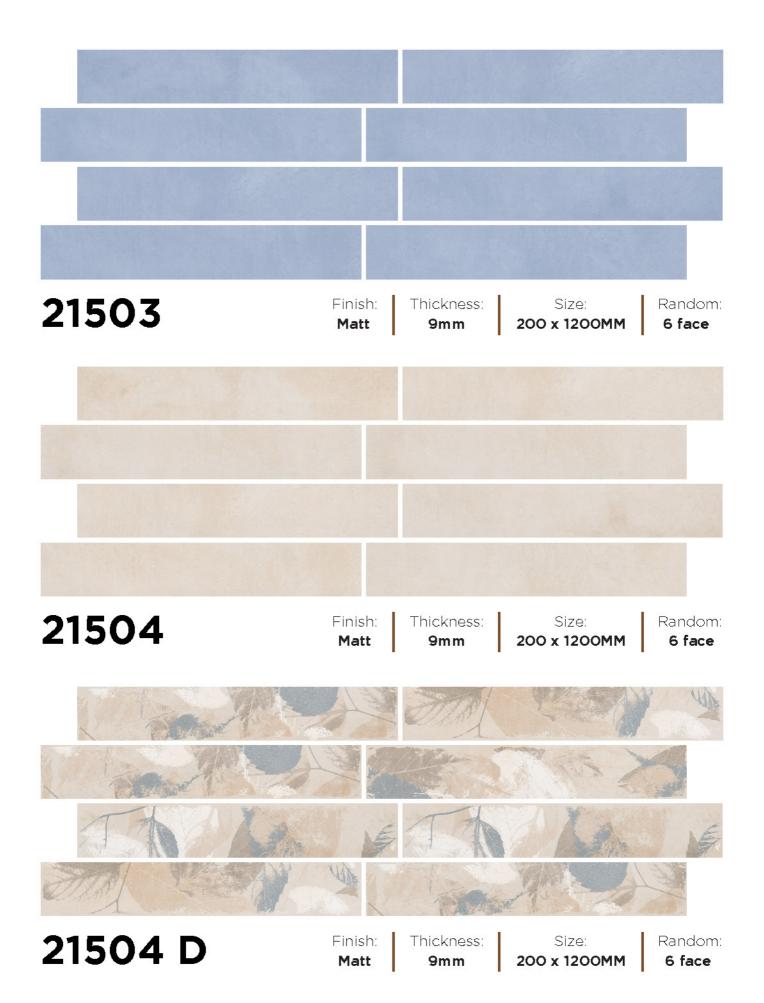









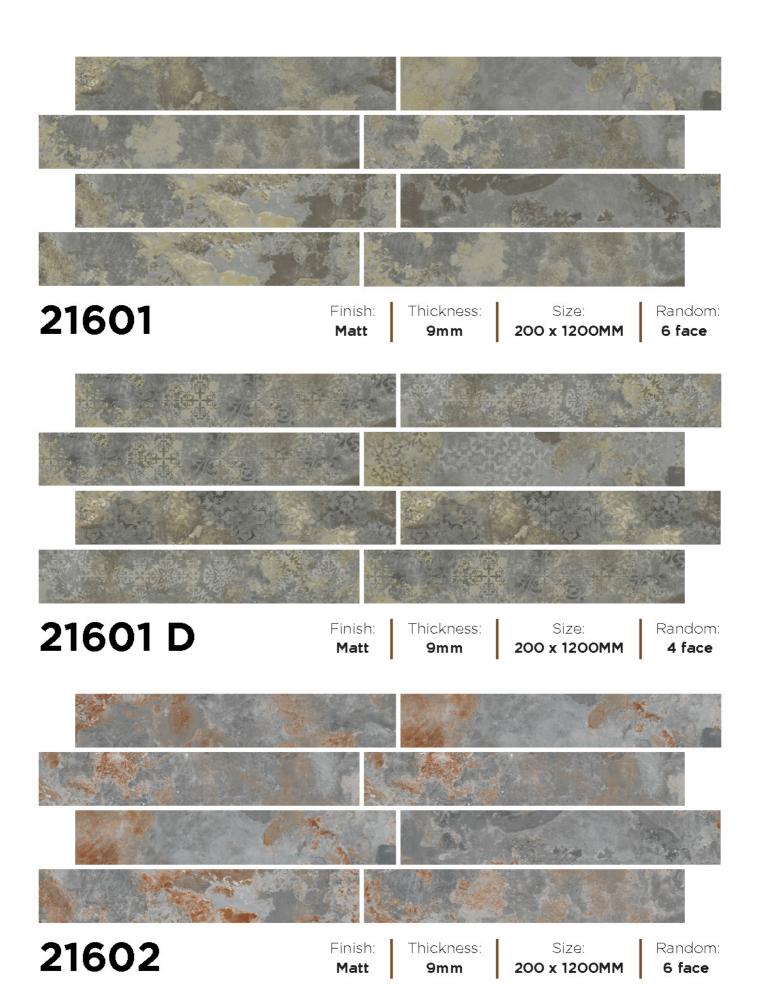





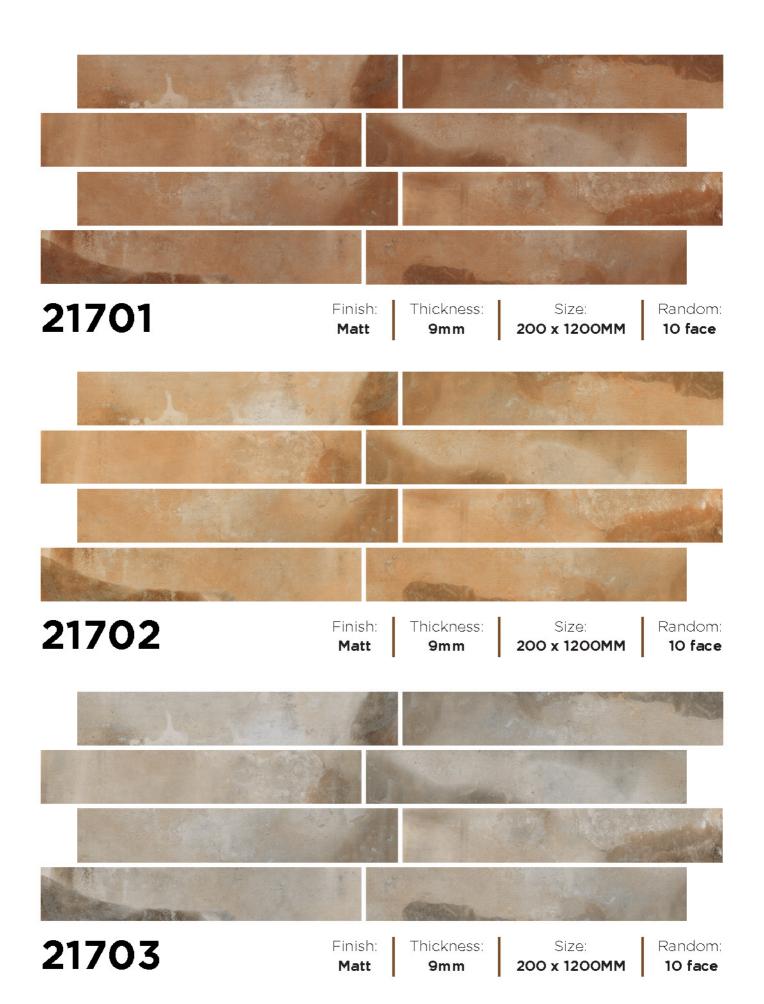

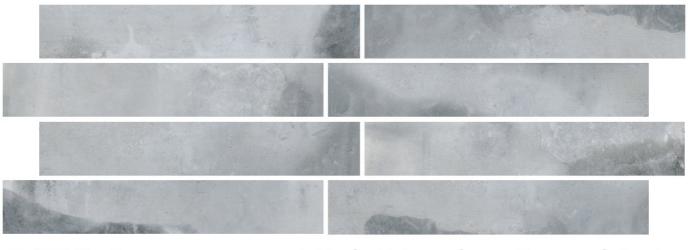


Finish: **Matt** Thickness: 9mm


Size: **200 x 1200MM**

Random: 10 face





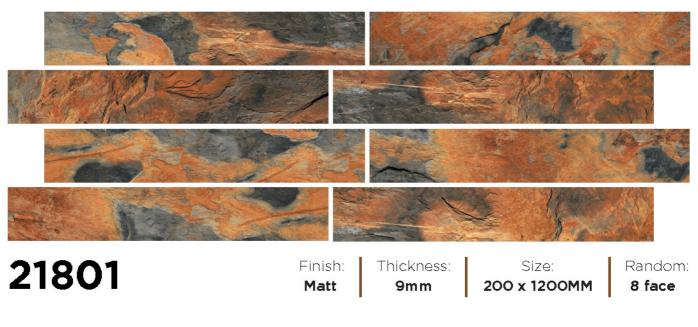

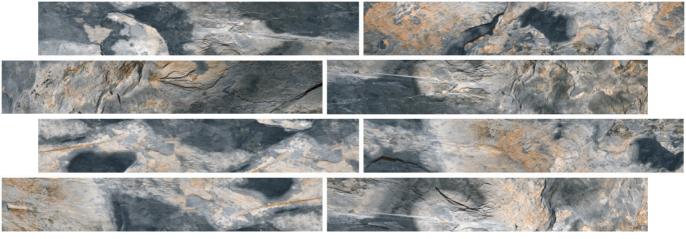


Finish: **Matt** Thickness: 9mm


Size: **200 x 1200MM**

Random: **8 face**





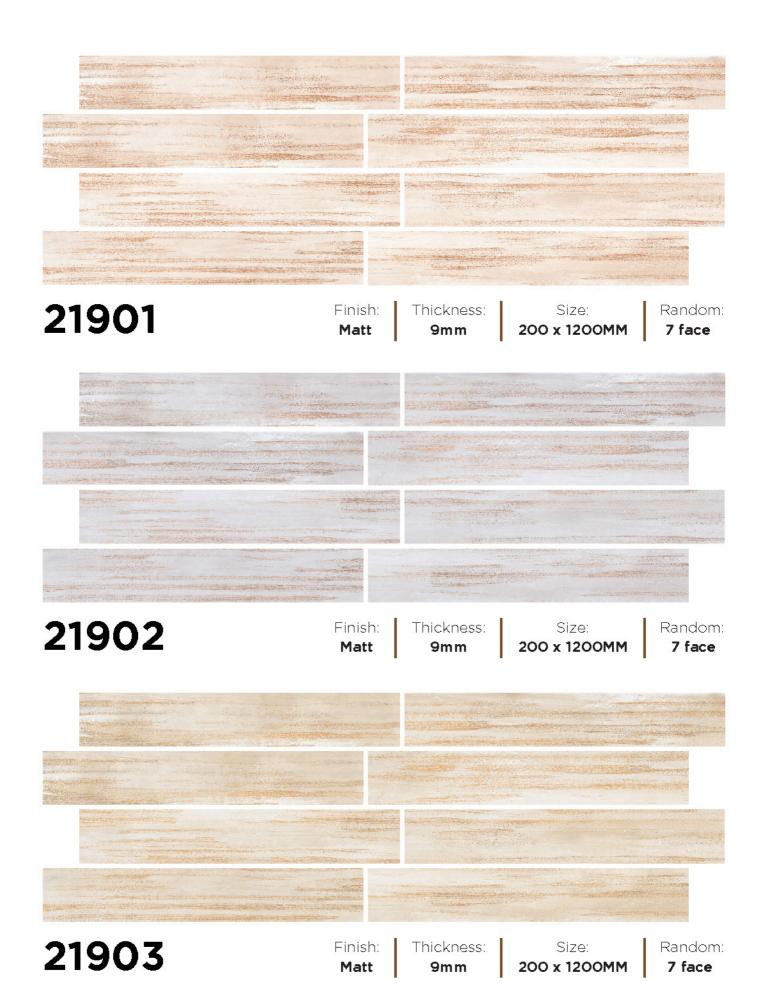

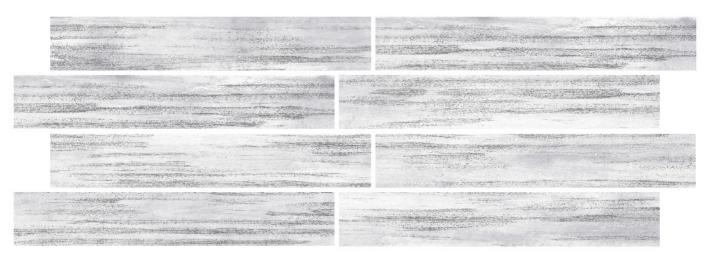

Finish: **Matt** Thickness:

Size: **200 x 1200MM** Random: **7 face**














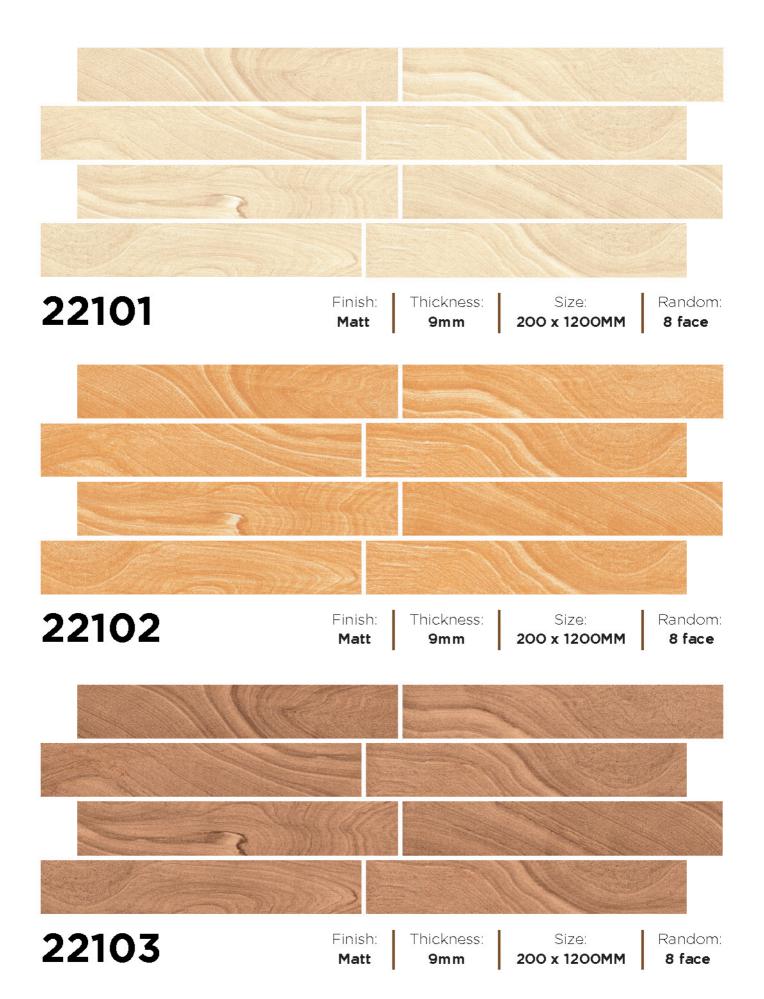



Finish: **Matt** Thickness:
9mm

Size: **200 x 1200MM**

Random: 8 face













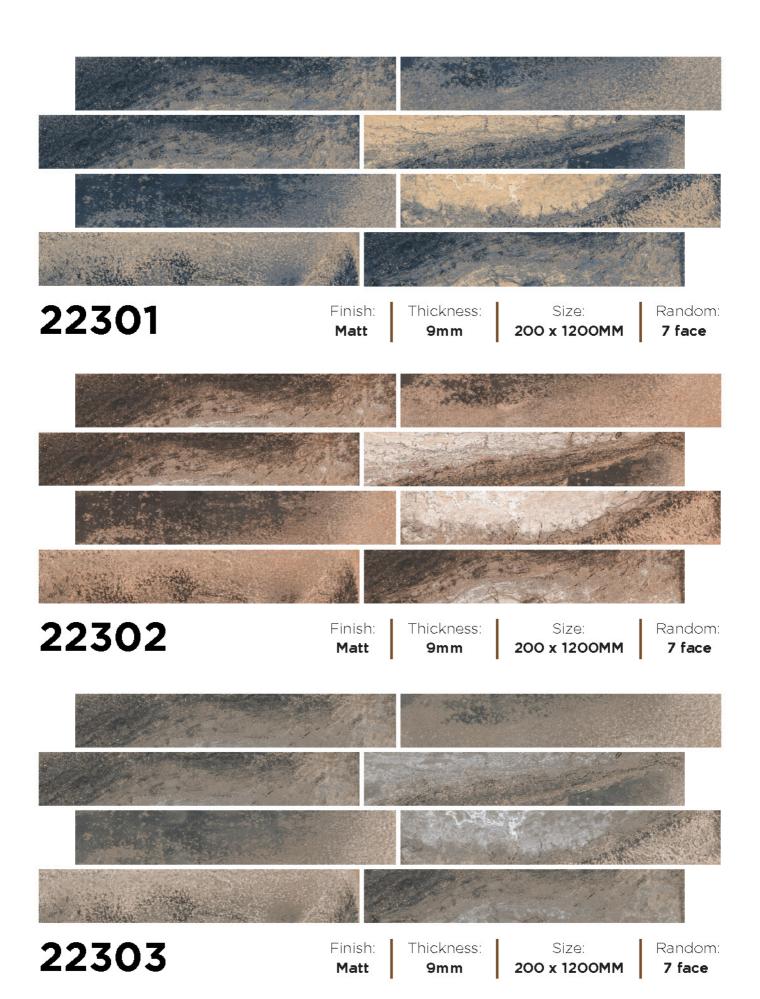






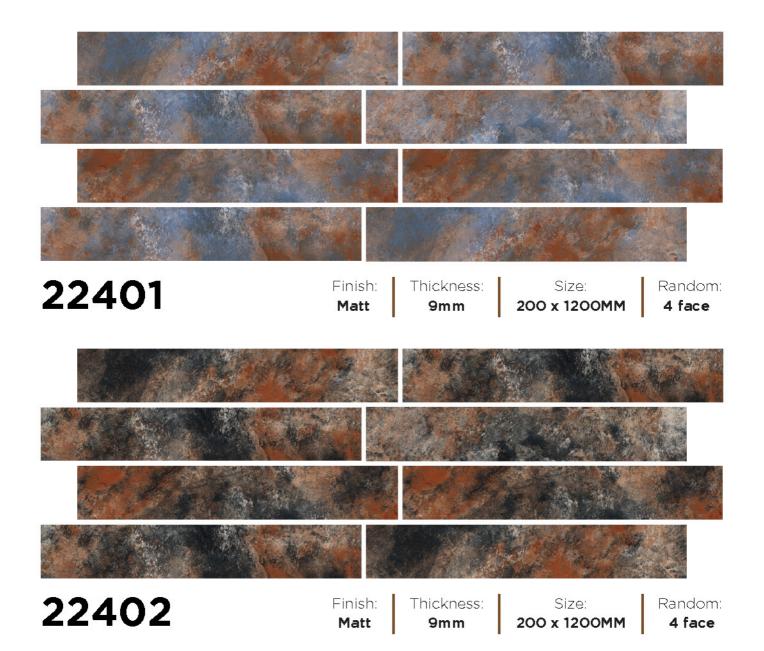







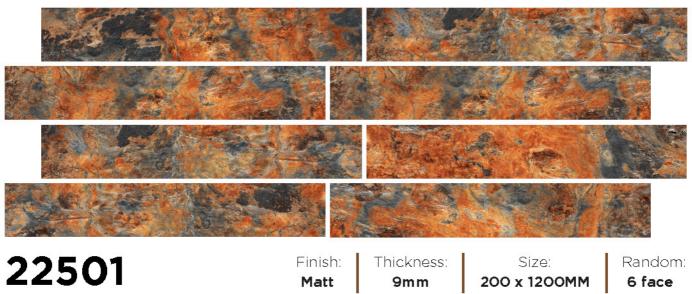





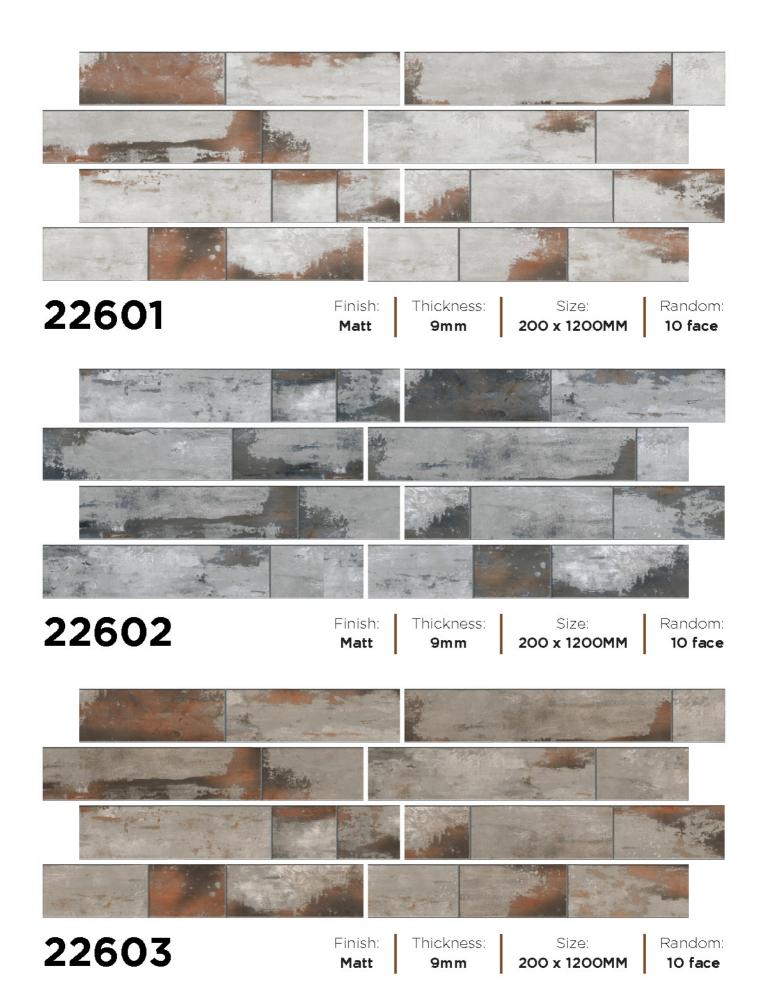


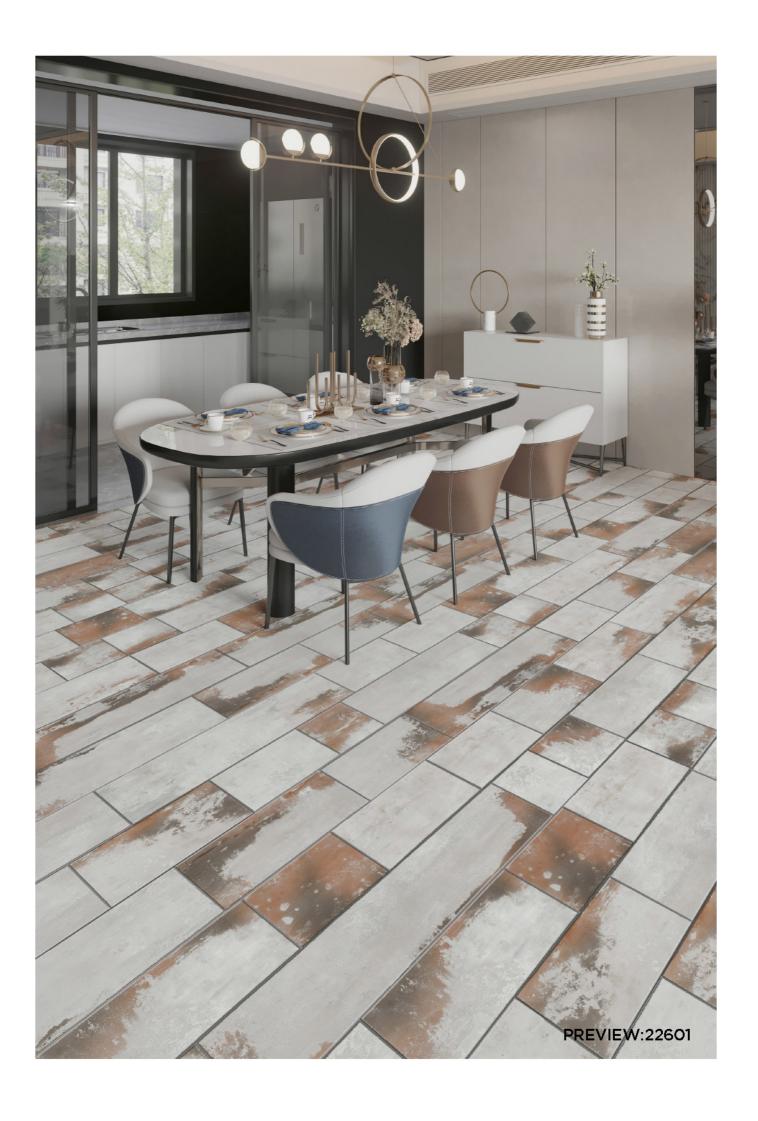








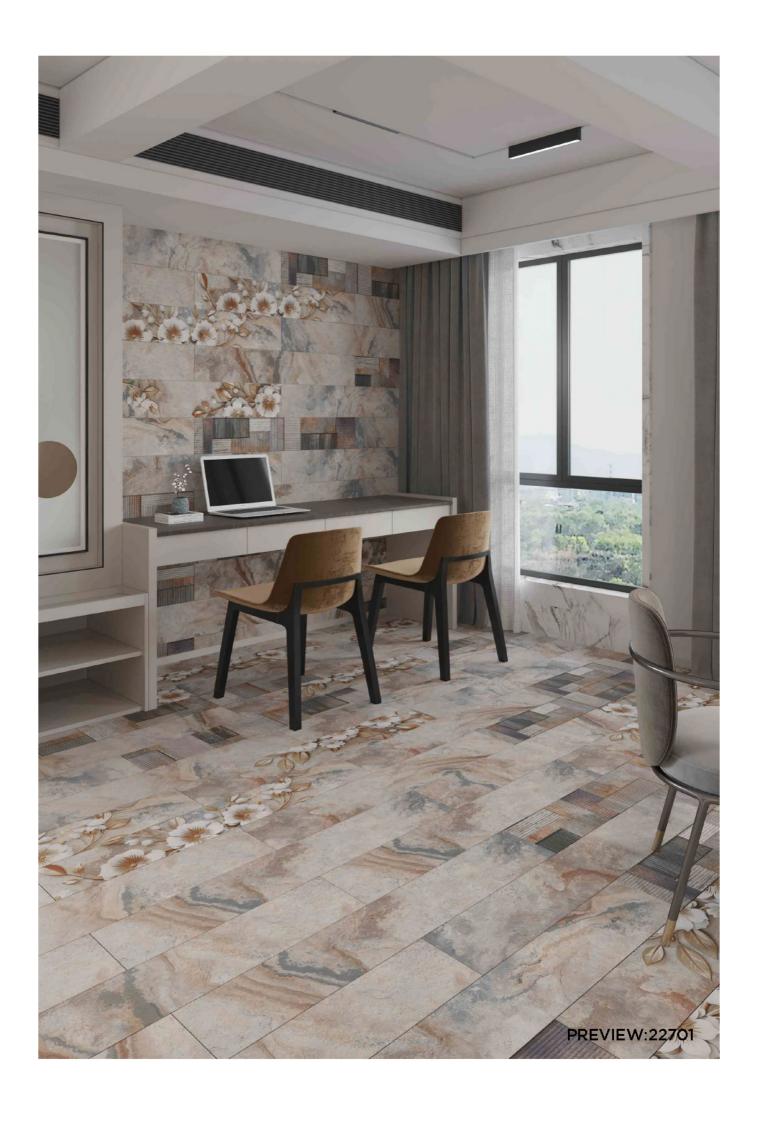


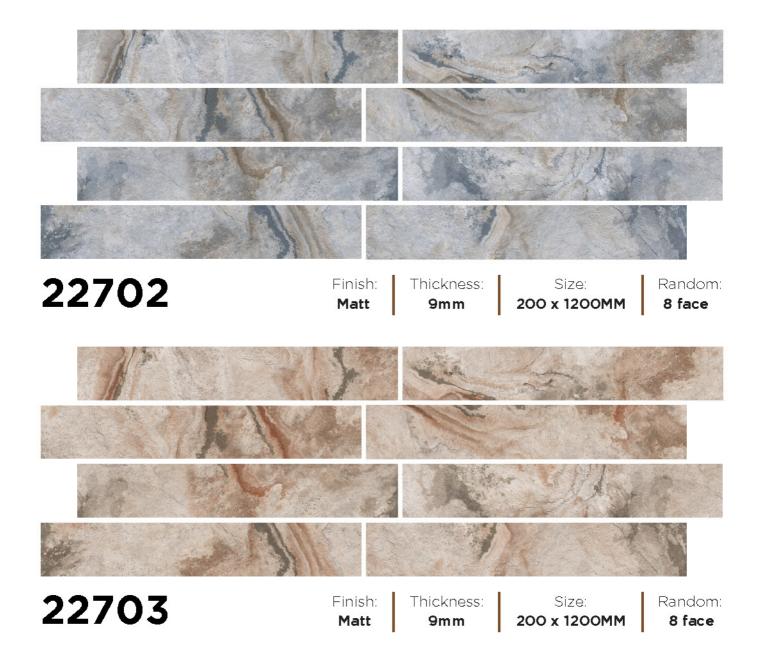



22801 D 22802




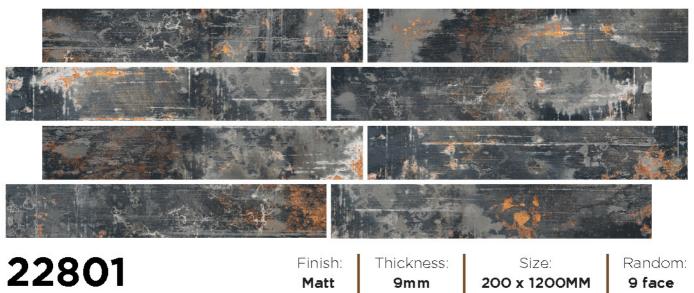

Matt

9mm

9 face

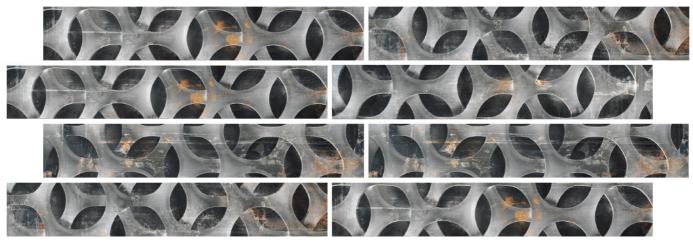

22801 D

Finish: Matt

Thickness: 9mm

200 x 1200MM

Random: 4 face




22802

Finish:


Thickness:

200 x 1200MM


Random: 9 face

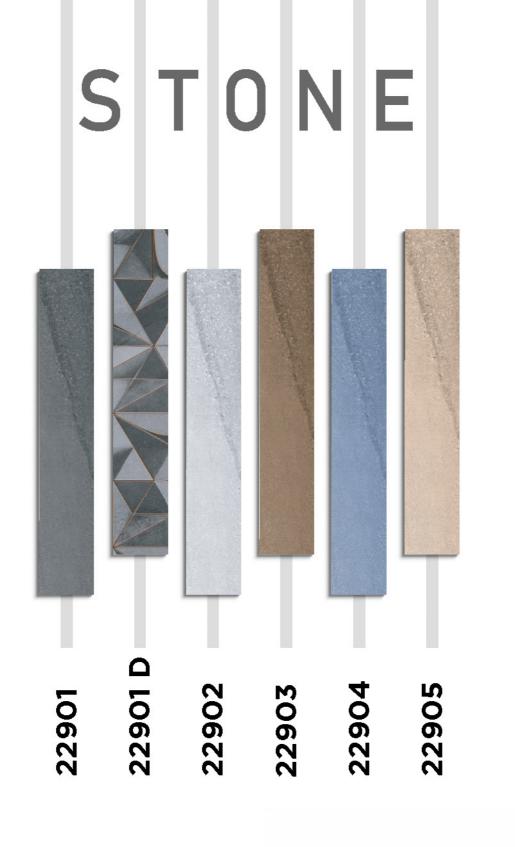



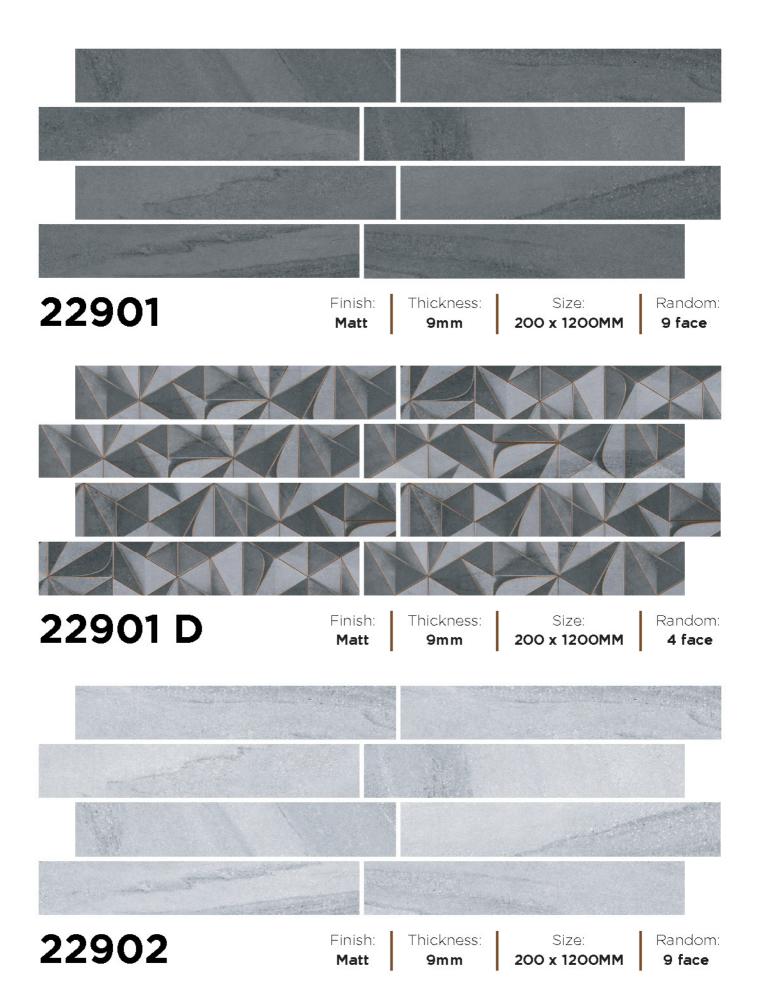




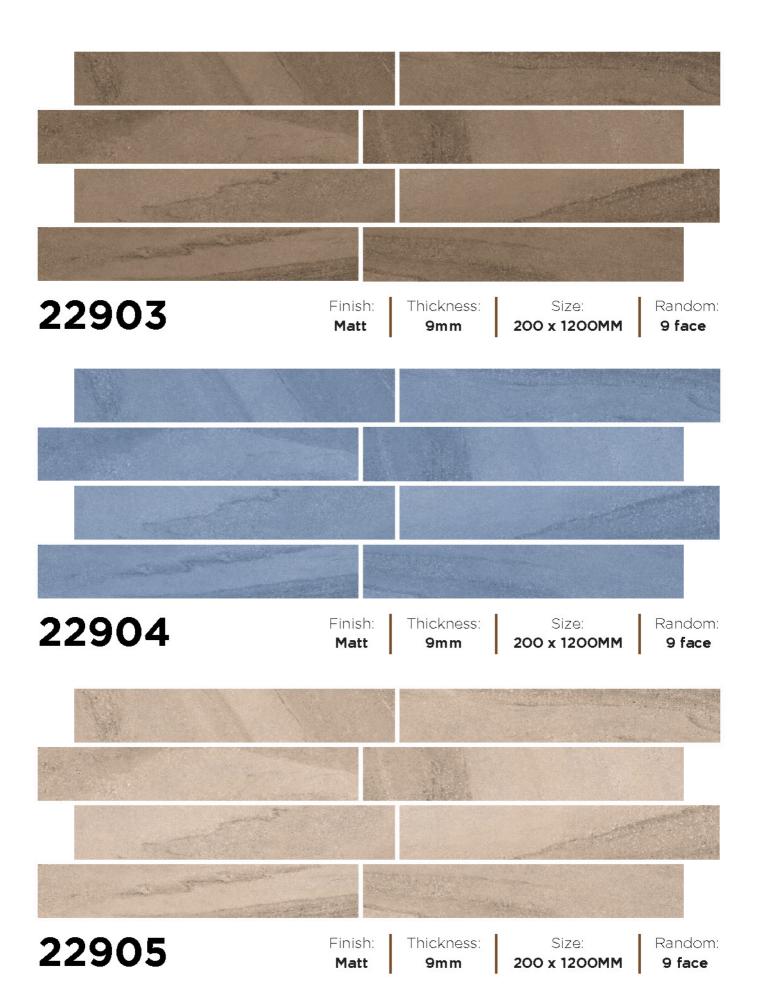





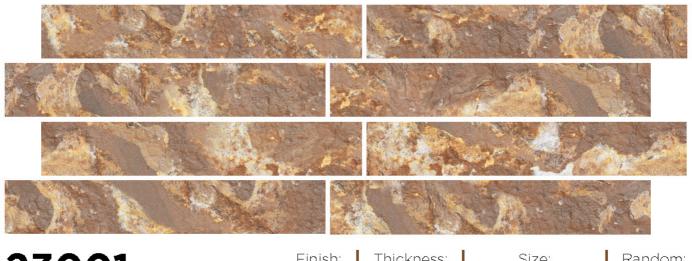

Finish: **Matt** Thickness:

Size: **200 x 1200MM**

Random: **9 face**













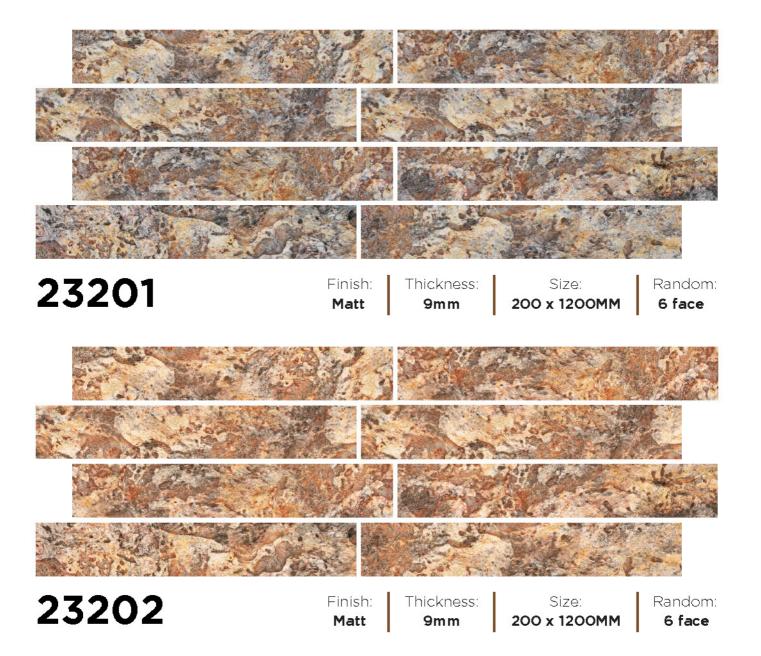






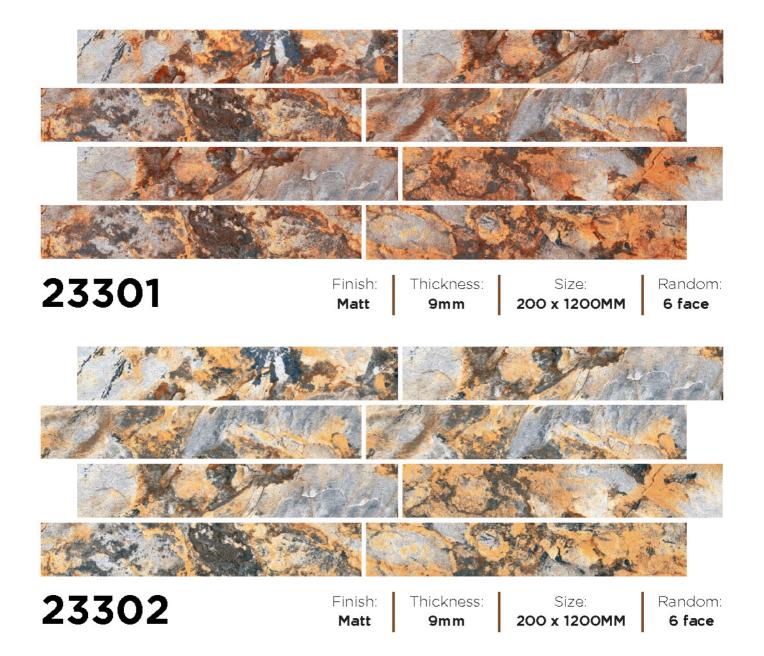





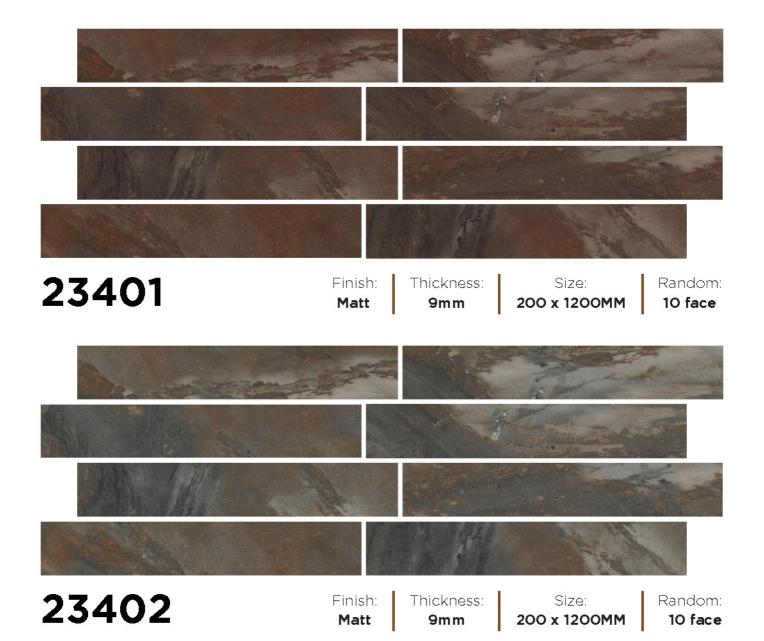





23501

23501 D



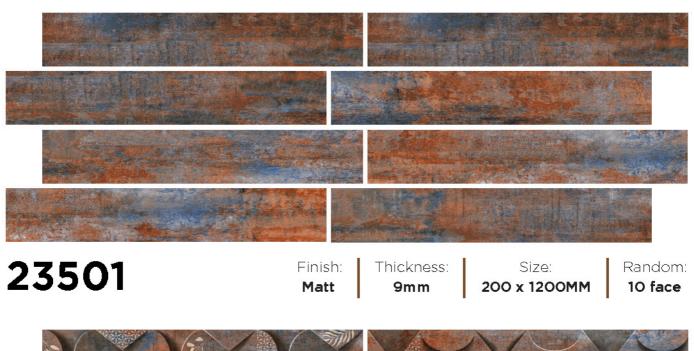


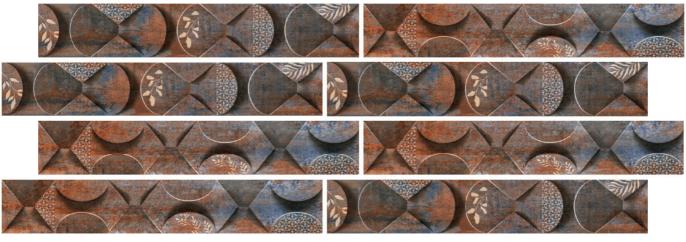

23501 D


Finish: **Matt** Thickness: 9mm

Size: **200 x 1200MM** Random: **2 face**

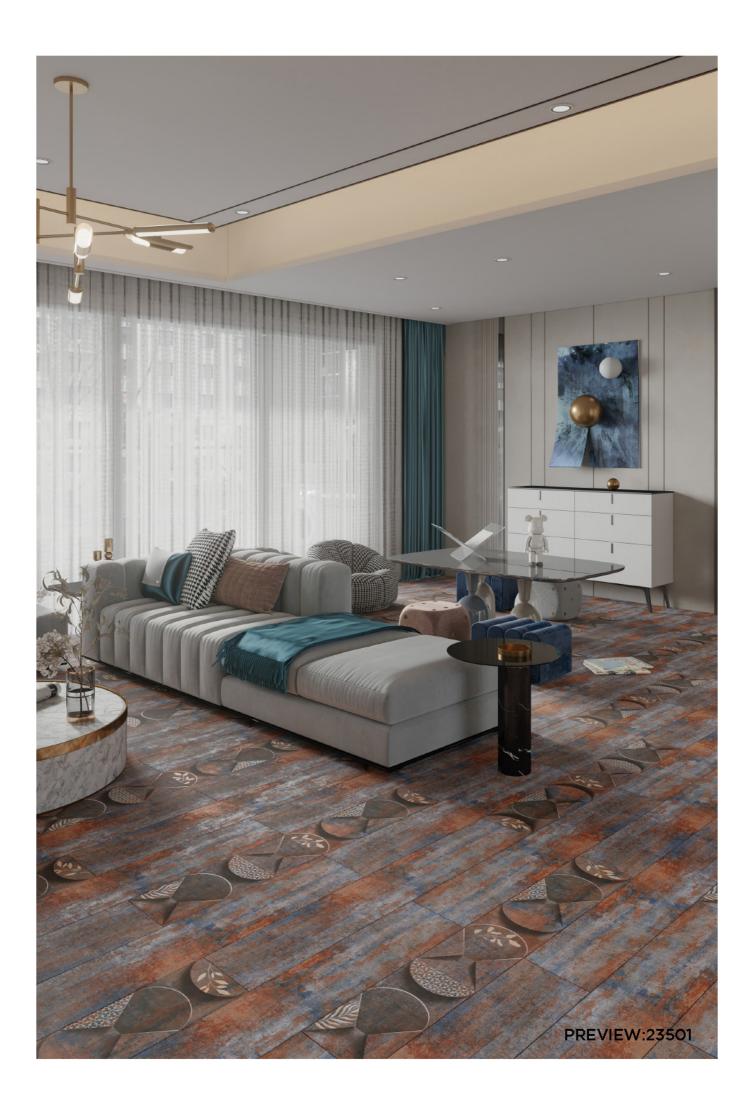





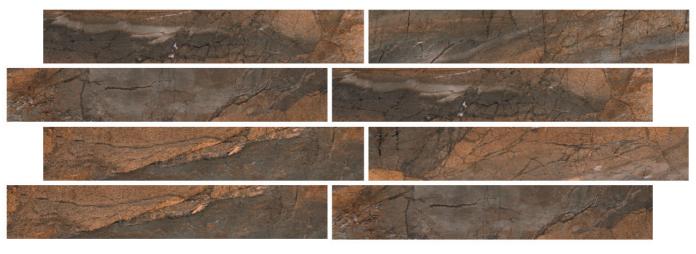

Finish: **Matt** Thickness: 9mm

Size: **200 x 1200MM**

Random: **5 face**





Finish: Matt

Thickness:

200 x 1200MM

Random: 10 face



Finish: **Matt** Thickness:

Size: **200 x 1200MM** Random: 10 face

Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles. Group Bla (Eb ≤ 0.5%)

| | Test | Requirements | | | | |
|---|-----------------------|---|-------------------------|-------------------------------|-------------------|--|
| Technical Feature | Method | % mm | | % | mm | |
| A. Dimensions and Surface Quality | | | | | | |
| Length and Width | UNI EN ISO 10545-2 | ± 0.6% | ± 2.0 | ± 0.20% | ±10 | |
| Thickness | | ± 5.0% | ± 0.5 | ± 5.00% | ± 0.5 | |
| Straightness of Sides | | ± 0.5% | ± 1.5 | ± 0.20% | ±10 | |
| Rectangularity | | ± 0.5% | ± 2.0 | ± 0.20% | ± 1.2 | |
| Surface Flatness a) Centre curvature b) Edge curvature c) Warpage | | ± 0.5% ± 0.5% ± 0.5% | ± 2.0 ± 2.0 ± 2.0 | ± 0.20% ± 0.20% ± 0.20% | ±10 ±10 ±10 | |
| Surface Quality | | A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles. | | Compliant | | |
| 3. Physical Properties | | | | | | |
| | | _ | | | | |

| Water Absorption | UNI EN ISO 10545-3 | Eb \$ 0.5% Individual maximum : 0.6% (absorbed water mass) | Eb < 0.1% (absorbed water mass) | |
|---|------------------------|--|--|--|
| Breaking Strength | LINILENI | Min. 1300 N | ≥ 1700 N | |
| Modulus of Rupture | UNI EN ISO 10545-4 | Average minimum 35 N/mm² Individual minimum 32 N/mm² | ≥ 37 N/mm² | |
| Frost Resistance | UNI EN ISO 10545-12 | Required | Compliant | |
| Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c | UNI EN ISO 10545-8 | Required | 6 x 10 ⁻⁸ K ⁻¹ max | |
| Scratch Hardness (Mohs scale) | EN 101 | Declared by the producer | 3 to 6 Depends on Finish & Color | |
| Crazing Resistance | UNI EN ISO 10545-11 | Declared by the producer | Cycle Pass | |

C. Chemical Properties

| Resistance to Staining | UNI EN ISQ 10545-14 | Minimum Class 3 | 5 | |
|---|------------------------|-----------------|-----|--|
| Resistance to Household Chemicals and Swimming Pool Salts | | Minimum GB | GA | |
| Resistance to Low Concentrations of Acids and Alkalis | UNI EN ISO 10 45-13 | To be reported | GLA | |
| Resistance to High Concentrations of Acids and Alkalis | | To be reported | GHA | |

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Packing Details

| Size | Thickness | pcs / Box | m² / Box | kg / Box | Total Box/ 1x20ft FCL | Total m ^e / 1x20ft FCL |
|------------|-----------------|-----------|------------|--------------------|--------------------------|--------------------------------------|
| 200x1200mm | 9.0mm (Approx.) | 5 рсв | 120 Sq.mtr | 26.70 kg (Approx.) | 1040 | 1248 |